



L'Énergie Sans Limite !  
Safe Energy for Life !



## Digital leisure & PABX

# Z3 EX ZenBOX 500/700/1000 VA

The range of Z3 ZenBox EX UPSs was designed to offer your home PC and personal multimedia devices appropriate protection against power supply problems and electrical disturbances. Its modern and compact design means it will elegantly fit into your personal multimedia environment.

### Advanced technology

Z3 ZenBox EX, with its High Frequency microprocessor-controlled technology, provides perfect protection from critical electrical disturbances. Depending on the model, it has 3 or 4 protected outlets offering up to 18 min of backup time for your screen, burner, decoder or PC in the event of a power cut.

### High performance protection

Depending on the model of the Z3 ZenBox EX chosen, 6 or 8 surge protected outlets as well as RJ 45 ports will help extend the useful life of your multimedia devices. In the event of power disturbances (overvoltage, short-circuit or lightning), all of your connected devices will be protected.

### User-friendly

- A single On/Off switch
- A USB communication port to enable you to operate the UPS from your computer
- 6 outlets on the front panel to easily connect the devices to be protected
- Audible alarms and LEDS indicate the energy status at a glance and warn you in the event of an electrical fault
- Cold start feature if no power supply
- UPS automatic restart when mains power is restored



PC & Mac



High Frequency Technology



6 or 8 FR/SCHUKO outlets  
(depending on the model)



Phone/ADSL line protection




USB communication port



Up to 18 min running time  
(Depending on the model and the connected loads)

# CONNECTIONS

1. Integrated power cable
2. Fuse
3. 3 FR/SCHUKO protected UPS outlets<sup>1</sup>
4. 3 FR/SCHUKO surge protected outlets<sup>1</sup>
5. Phone/ADSL line protection
6. USB Port
7. 1 FR/SCHUKO protected UPS outlets<sup>1</sup> (700 and 1000 VA models)
8. 1 FR/SCHUKO surge protected outlet<sup>1</sup> (700 and 1000 VA models)

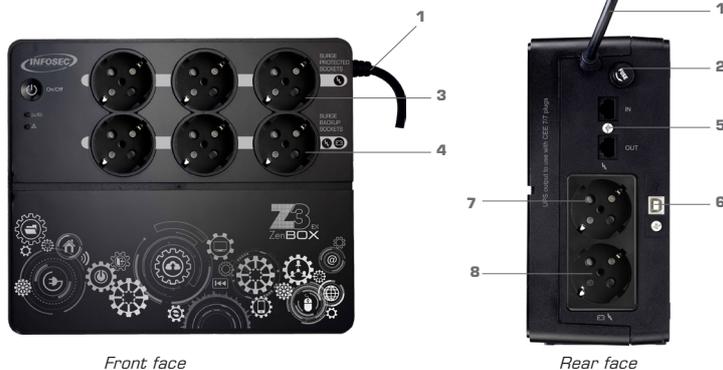

Front face

Rear face



**500/700/1000 VA**

## Connections

Z3 ZenBox EX 500 VA: 3 FR/SCHUKO protected outlets and 3 FR/SCHUKO surge protected outlets<sup>1</sup>. Z3 ZenBox EX 700 and 1000 VA: 4 FR/SCHUKO protected outlets and 4 FR/SCHUKO surge protected outlets<sup>1</sup>.

The ZenBox EX range also offers effective protection of the Tel/ADSL line via 2 RJ 45 connectors.

<sup>1</sup> To use with FR/Schuko CEE / 7-7 outlets

# TECHNICAL CHARACTERISTICS

	Z3 Zenergy Box 500	Z3 Zenergy Box 700	Z3 Zenergy Box 1000
--	--------------------	--------------------	---------------------

## GENERAL CHARACTERISTICS

Technology	High Frequency		
Output form	Modified Sinewave		
Power	500 VA	700 VA	1000 VA
Power Factor	0,5	0,5	0,5
Surge protected outlets <sup>1</sup>	3	4	4
Backup time outlets <sup>1</sup>	3	4	4
Tel / ADSL line protection	RJ 45 (1 IN / 1 OUT)	RJ 45 (1 IN / 1 OUT)	RJ 45 (1 IN / 1 OUT)

## PROTECTION & FILTERING

Protection	Discharge / Overcharge / Tel/ADSL line & Network protection		
Input protection	Fuse		

## PHYSICAL CHARACTERISTICS

Dimensions - HxLxP (mm)	200 x 230 x 92,5		
Net weight kg	2,5	3,1	3,4

## INPUT TECHNICAL CHARACTERISTICS

Voltage	220/230/240 VAC		
Voltage range	180-270 VAC		
Frequency	50 Hz ou 60 Hz (auto sensing)		

## OUTPUT TECHNICAL CHARACTERISTICS (battery mode)

Voltage	220/230/240 VAC		
Automatic voltage regulation	± 10%		
Frequency	50 Hz ou 60 Hz ± 1 Hz		

## BATTERY

Battery charger	Operates when the UPS is connected to mains		
Cold start (no mains)	yes	yes	yes
Recharging time	8 hours to 90% after complete discharge		
Backup time (1 PC load)	8 min.	14 min.	18 min.
Protection	Deep discharge / Charger overvoltage		

## INDICATORS & ALARMS

Indicators	2 LEDs		
Alarms	Battery mode, low battery, overload		

## COMMUNICATION

Communication	USB port		
Software	InfoPower		

## ENVIRONMENT

Ideal environment	0-40°C, 0-90% of relative humidity (without condensation)		
Noise level	< 40 dB		

## NORMS

Standard	CE RoHS		
EMC (electromagnetic compatibility)	EN 62040-2:2006, EN62040-2:2006, EN61000-3-2:2014, EN61000-3-3:2013, EN61000-4-2:2009, EN61000-4-3:2006+A1:2008+A2:2010, EN 61000-4-4:2012, EN61000-4-5: 2014, EN 61000-2-2:2002		
Low voltage (Safety)	EN 62040-1:2008 +A1: 2013		

## SALES INFO

Warranty	3 years		
Insurance	Limitless		
PN	66074	66075	66076

## UPS remote communication solution

A USB communication port enables the UPS to be operated remotely from a PC and to use automatic shutdown software. The InfoPower software can be downloaded free of charge from our website.

## Packaging content

- Z3 ZenBox EX UPS (see power on packaging cover).
- User manual.



## Insurance

Unlimited value coverage for the connected hardware.



If your hardware, correctly connected, is damaged by overvoltage caused by atmospheric conditions affecting the mains power supply, INFOSEC will replace your UPS and, at its discretion, subsequent to an expert appraisal, repair or reimburse the connected hardware (at the replacement value on the day of the accident).

See detailed conditions and registration procedure on the website (within 10 days of purchase).

## Warranty

3-year warranty against manufacturing defects under normal conditions and compliance with precautionary measures. Warranty to be taken out on [www.infosec-ups.com](http://www.infosec-ups.com) within 10 days of purchase.



## Infosec Communication

15, Rue du Moulin  
44880 SAUTRON - FRANCE

### Sales contact

Tel: +33 2 40 76 11 77  
sales@infosec.fr

[www.infosec-ups.com](http://www.infosec-ups.com)

