



L'Énergie Sans Limite !
Safe Energy for Life !



Digital leisure - IT systems for SMEs



From 500 to 1000 VA

Zen Live UPS provide essential protection against power supply problems and dangerous electrical disturbances for IT equipment, whether domestic or tertiary.

Basic electrical protection

In the event of short or prolonged power cuts, the Zen Live's batteries ensure that your connected hardware continues to be supplied with power. Users benefit from several vital minutes to close running applications and turned off their PCs with peace of mind.

Effective technology

Equipped with Line Interactive technology and Automatic Voltage Regulation, Zen Live ensures your connected devices are supplied with a high quality, regular current during major fluctuations without using the batteries.

Energy saving functions

- UPS automatic restart when mains power restored
- Automatic battery charge when UPS OFF: the battery automatically recharges when there is mains power and the UPS is OFF. This function ensures that when connected devices are not in use and the UPS is OFF, batteries continue charging

Designed for ease of use

- Single ON/OFF switch
- 1 or 3 indicators light (depending on models) as well as audible alarms indicate status of the UPS
- Cold start feature if no power supply
- Wall mounting system




PC & Mac



Line Interactive Technology



4 Schuko/FR outlets



Up to 15 mn backup time*

* Depending on model and connected load




Zen Live 500 / 650 VA



Zen Live 800 / 1000 VA

CONNECTION

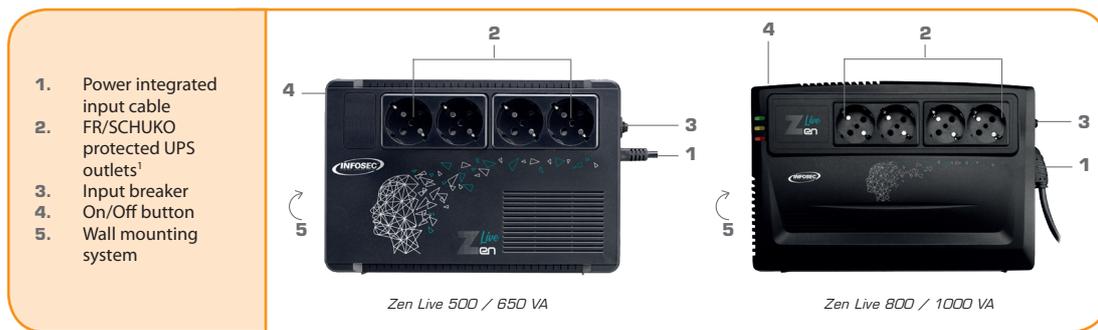

From 500 to 1000 VA

Connection

4 Schuko/FR¹ protected UPS outlets

¹ To use with FR/Schuko CEE 7-7 plugs.

TECHNICAL CHARACTERISTICS

	Zen Live 500	Zen Live 650	Zen Live 800	Zen Live 1000
--	--------------	--------------	--------------	---------------

GENERAL CHARACTERISTICS

Technology	Line Interactive with Automatic Voltage Regulation			
Power	500 VA	650 VA	800 VA	1000 VA
Power factor	0,6	0,6	0,6	0,6
Schuko/FR ¹ protected UPS outlets	4	4	4	4

PROTECTION & FILTERING

Output form	Modified sinewave			
Protection	Discharge / overcharge / overload			
Input protection	Breaker			

PHYSICAL CHARACTERISTICS

Dimensions D x W x H (mm)	245 x 163 x 90		292 x 199 x 91	
Net weight (kg)	3,5	4	5,6	5,8

INPUT TECHNICAL CHARACTERISTICS

Voltage	220/230/240 VAC			
Voltage range	162-290 VAC			
Frequency	50/60 Hz (auto sensing)			

OUTPUT TECHNICAL CHARACTERISTICS

Voltage	220/230/240 VAC			
Automatic Voltage Regulation (battery mode)	± 10 %			
Frequency range	50/60 Hz ± 1 Hz			

BATTERY

Battery charger	Operates when UPS is connected to mains			
Cold start (no mains)	yes			
Recharging time	4-6 hours recover to 90% capacity			
Backup time (1 PC) ²	5 min.	8 min.	13 min.	15 min.

INDICATORS & ALARMS

Indicators	1 LED			
Alarms	Battery mode, low battery mode, overload, battery replacement, fault			

ENVIRONMENT

Ideal environment	0-40°, 0-90% of relative humidity (without condensation)			
Noise level	<40 dB			

NORMS

Standard	CE RoHS			
(EMC) Electromagnetic Compatibility	EN 62040-2:2006+AC:2006			
Low voltage (safety)	EN62040-1 :2008+A1 :2013			

SALES INFORMATION

Warranty	2 years			
Insurance	120 000 €			
PN	66081	66082	66083	66084

¹ To use with FR/Schuko CEE 7-7 plugs

² Backup time depends on battery charge, temperature and type of connected load.
Technical specifications are subject to change without notice.

Package content

- 1 UPS Zen Live
- 1 user manual



Insurance

Connected hardware coverage to a value of 120 000 €.



If your hardware, correctly connected, is damaged by overvoltage caused by atmospheric conditions affecting the mains power supply, INFOSEC is bound to replace your UPS and, at its discretion, subsequent to an expert appraisal, repair or reimburse the connected hardware (at the replacement value on the day of the accident).

See detailed conditions and registration procedure on the website (within 10 days of purchase).

Warranty

2-year warranty against manufacturing defects under normal conditions and compliance with precautionary measures.



Warranty to be taken out on our website within 10 days of purchase.



Infosec Communication

15 Rue du Moulin
44880 SAUTRON - FRANCE

Sales contact

Tél : 02 40 76 11 77

sales@infosec.fr

www.infosec-ups.com

